


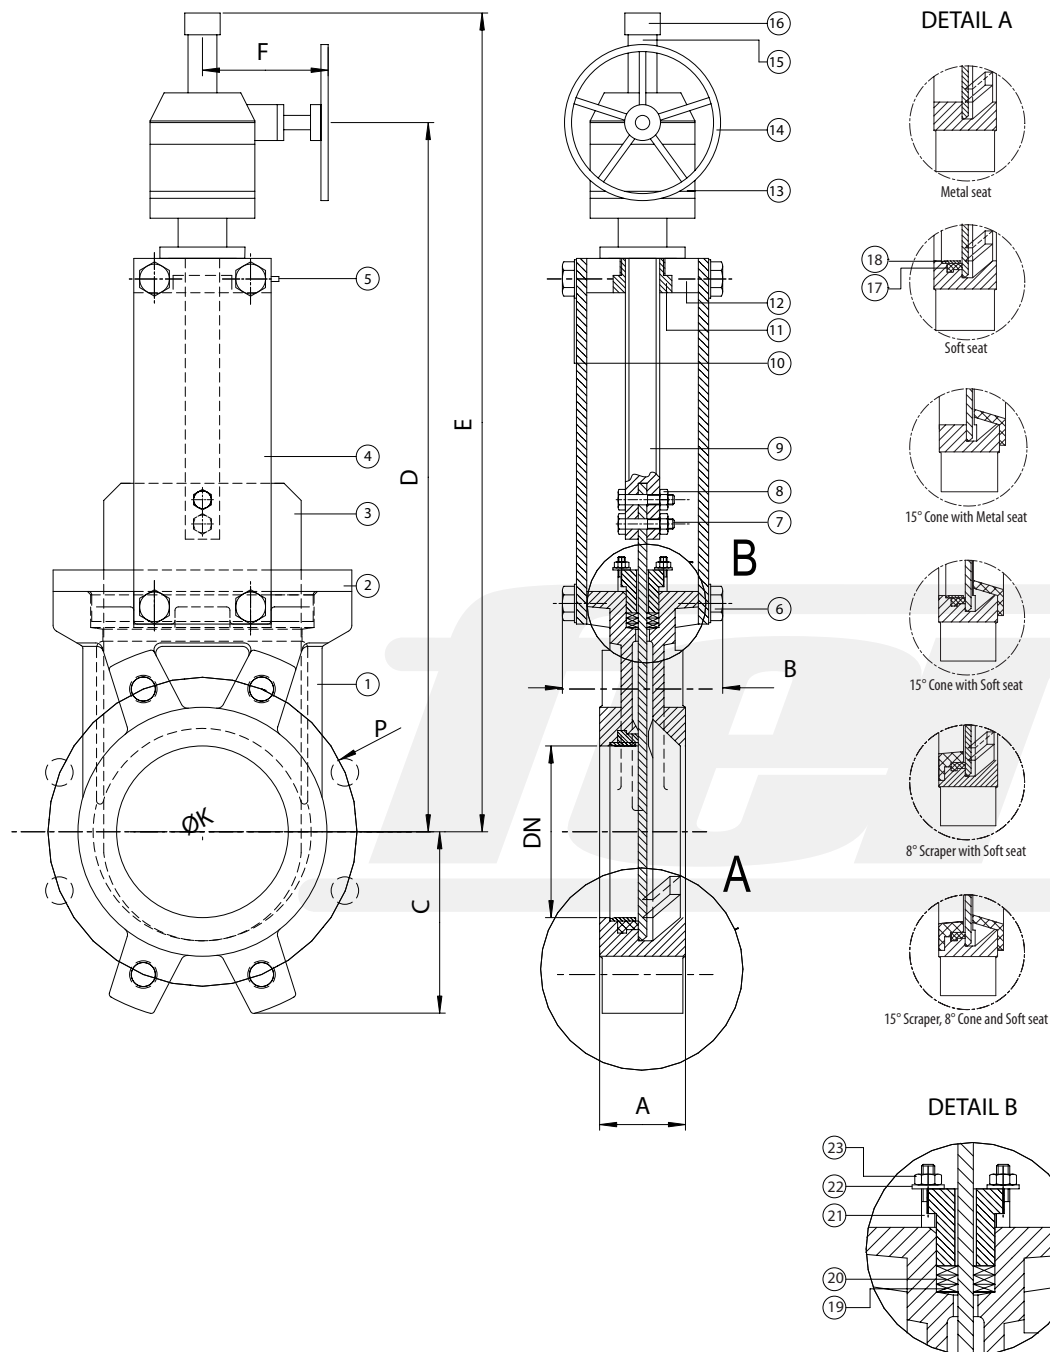

Dimensions*

DN	INCH	A	B	C	D	E	F
200	8"	60	119	160	632	947	320
250	10"	70	119	198	733	1048	320
300	12"	70	119	234	833	1148	320
350	14"	96	194	256	974	1390	320
400	16"	100	194	292	1080	1495	320
450	18"	106	290	308	1168	1783	320
500	20"	110	290	340	1273	1890	320
600	24"	110	290	400	1476	2095	320
700	28"	110	300	452	1680	2330	320
800	32"	110	300	505	1885	2640	320
900	36"	110	350	555	2120	2975	320
1000	40"	110	350	610	2315	3280	375
1200	48"	150	400	725	2810	3960	375

Materials*

Execution in:	Cast iron	Stainless steel
1 Body	GG25	1.4408/CF8M
2 Packing gland	Aluminium	1.4408/SS316
3 Gate	1.4301/SS304	1.4408/SS316
4 Support plates	Steel	Steel
5 Collet	Aluminium	Aluminium
6 Nuts	Stainless steel	Stainless steel
7 Nuts	Stainless steel	Stainless steel
8 Nuts	Stainless steel	Stainless steel
9 Shaft	1.4301/SS304	1.4301/SS304
10 Washer	Stainless steel	Stainless steel
11 Scraper	Bronze	Bronze
12 Bridge	Steel	Steel
13 Gear box		
14 Hand wheel	Steel	Steel
15 Shaft	Steel	Steel
16 Cap	Plastic	Plastic
17 Seat joint	EPDM / NBR / Viton / Silicon / Flucast ABP / PTFE	
18 Sealing ring	1.4408/SS316	1.4408/SS316
19 Packing	Synt. + PTFE / PTFE / Graphite / Ceramic fibre	
20 Packing joint	EPDM / NBR / Viton / PTFE	
21 Gland fixing	Stainless steel	Stainless steel
22 Washer	Stainless steel	Stainless steel
23 Nut	Stainless steel	Stainless steel

Pressure

DN50 - DN250:	10 bar
DN300 - DN400:	6 bar
DN450:	5 bar
DN500 - DN600:	4 bar
DN700 - DN1200:	2 bar

Colour*

RAL 5015

Flanges drilled according to
EN 1092-2 and DIN 2501: ISO PN10
(for further informations please visit our download
section on our website)

*Other dimensions / materials / colours on request