


Straight-through type diaphragm valve with threaded ends

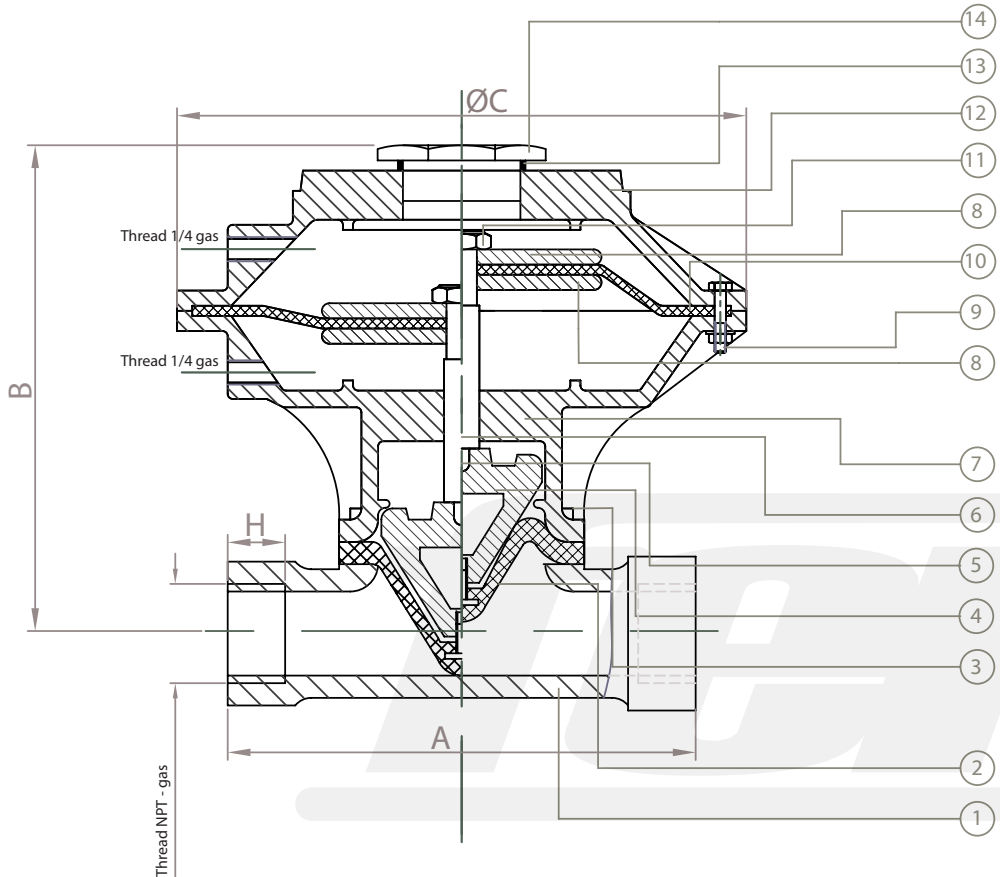

Dimensions*

DN	INCH	Ø C	B	A	H	Weight, [kg]
20	3/4"	250	165	113	12	
25	1"	250	165	113	12	
32	1 1/4"	250	165	135	15	
40	1 1/2"	250	165	140	15	
50	2"	250	225	165	15	
65	2 1/2"	450	320	210	15	

Materials*

1	Body	Ductile iron
2	Diaphragm	Rubber
3	Union studs	8.8
4	Compressor	Cast iron
5	Pin	Stainless steel
6	Spindle	Stainless steel
7	Lower plate	Cast iron
8	Piston Ø65	Ductile iron
8	Piston Ø20 - Ø50	Cast iron
9	Union studs	8.8
10	Motor diaphragm	Rubber
11	Spindle nut	Autobloc
12	Upper plate	Cast iron
13	Toric joint	Nitrile
14	Screw-on cap	F212

Pressure:

DN20 - DN50: 7 bar
DN65: 5 bar

Recommended air motor pressure: 4,5kg/cm2

Colour*

 RAL 5015

For further informations please visit our download section on our website.

*Other dimensions / materials / colours on request