


Straight-through type diaphragm valve with threaded ends and emergency handwheel

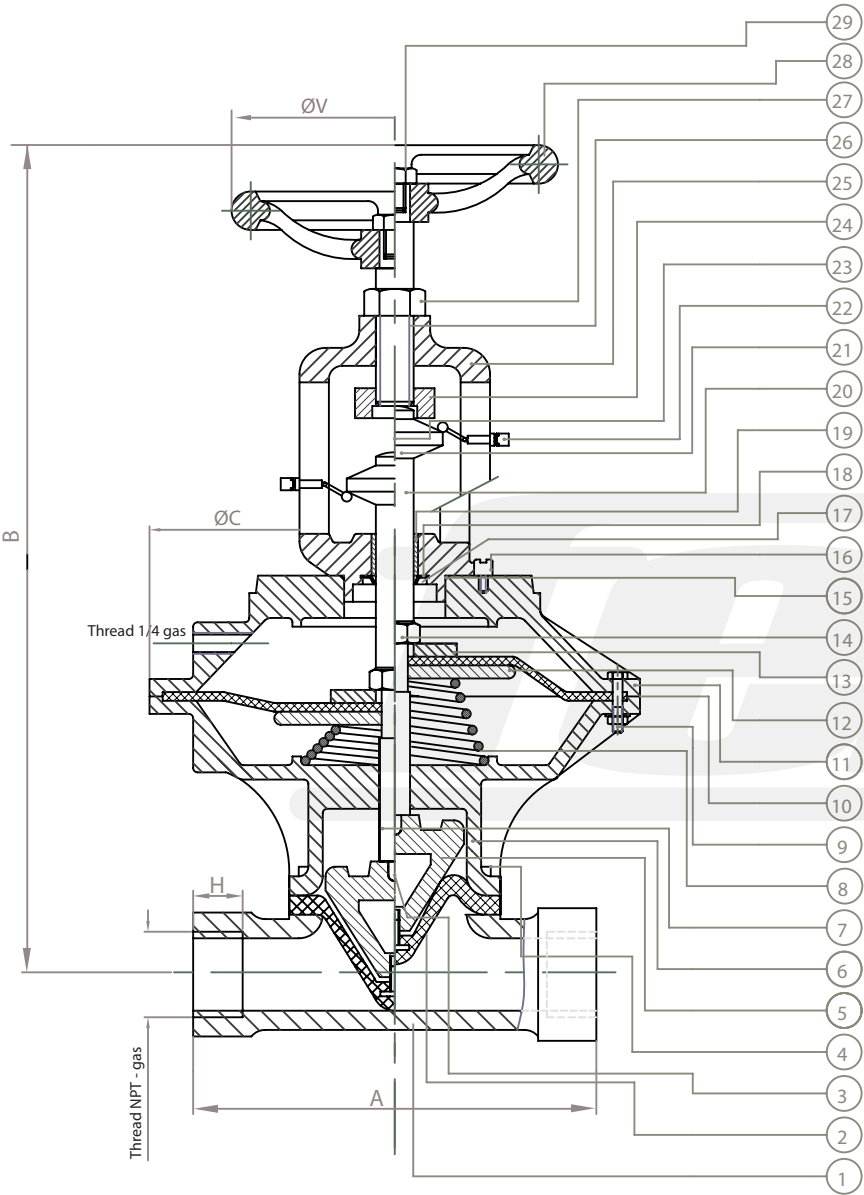

Dimensions*

DN	INCH	Ø C	Ø V	B	A	H	Weight, [kg]
20	3/4"	250	160	395	113	12	
25	1"	250	160	400	113	12	
32	1 1/4"	250	160	405	135	15	
40	1 1/2"	250	160	453	140	15	
50	2"	250	160	455	165	15	
65	2 1/2"	450	250	695	210	15	

Materials*

1	Body	Ductile iron
2	Diaphragm	Rubber
3	Pin	Stainless steel
4	Union studs	8.8
5	Compressor	Cast iron
6	Lower plate	Cast iron
7	Spindle	Stainless steel
8	Spring	F143
9	Union studs	8.8
10	Motor diaphragm	Rubber
11	Upper plate	Cast iron
12	Piston	Cast iron
13	Washer	F114
14	Spindle nut	Autobloc
15	Toric joint	Nitrile
16	Positioner screw	12.9
17	Gasket clamp	Stainless steel
18	Bonnet joint	Nitrile
19	Bearing	Bronze
20	Arcade spindle	Stainless steel
21	Cam	Stainless steel
22	Microswitches	XCM F102
23	Stop screw	Stainless steel
24	Guide nut	Steel
25	Arcade	Cast iron
26	Handwheel spindle	Steel
27	Butt screw	Steel
28	Handwheel	Cast iron
29	Handwheel fix stud	F212

Pressure:

DN20 - DN50:	7 bar
DN65:	5 bar

Recommended air motor pressure: 4,5kg/cm2

Colour*

RAL 5015

For further informations please visit our download section on our website.

*Other dimensions / materials / colours on request