


Straight-through type diaphragm valve with threaded ends

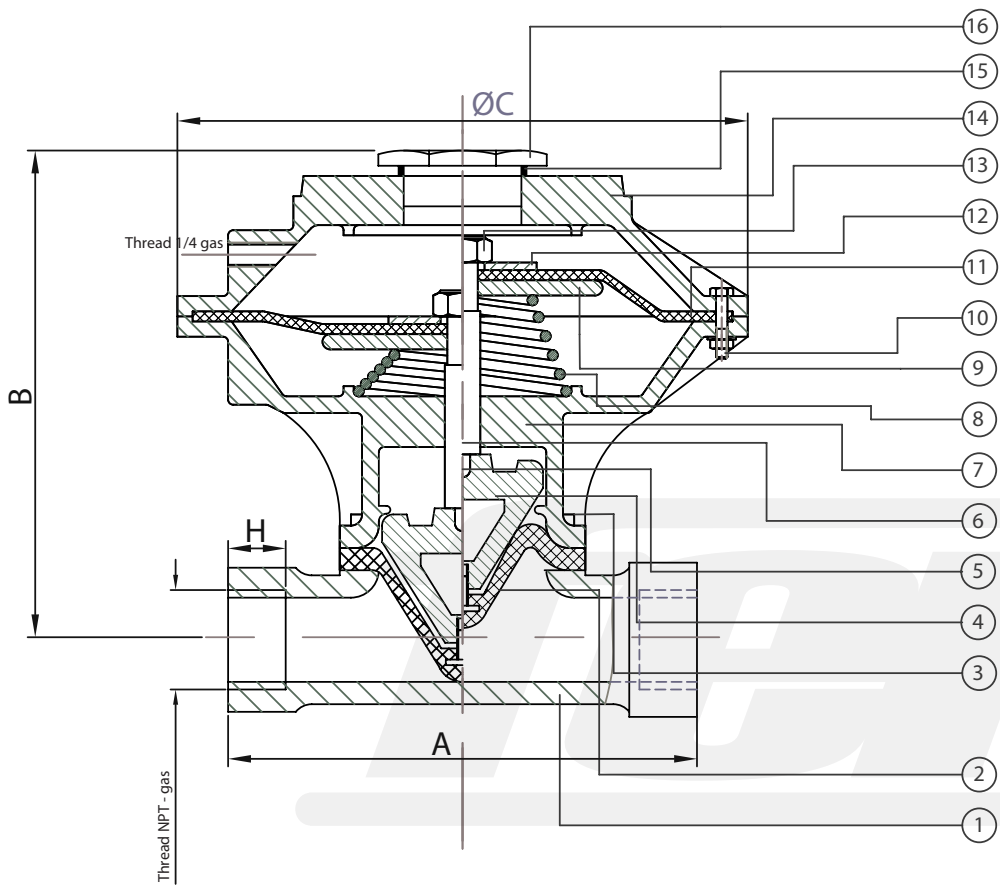

Dimensions\*

DN	INCH	Ø C	B	A	H	Weight, [kg]
20	3/4"	250	165	113	12	
25	1"	250	165	113	12	
32	1 1/4"	250	165	135	15	
40	1 1/2"	250	165	140	15	
50	2"	250	225	165	15	
65	2 1/2"	450	320	210	15	

Materials\*

1	<b>Body</b>	Ductile iron
2	<b>Diaphragm</b>	Rubber
3	<b>Union studs</b>	8.8
4	<b>Compressor</b>	Cast iron
5	<b>Pin</b>	Stainless steel
6	<b>Spindle</b>	Stainless steel
7	<b>Lower plate</b>	Cast iron
8	<b>Spring</b>	F143
9	<b>Piston</b>	Cast iron
10	<b>Union studs</b>	8.8
11	<b>Motor diaphragm</b>	Rubber
12	<b>Washer</b>	F114
13	<b>Spindle nut</b>	Autobloc
14	<b>Upper plate</b>	Cast iron
15	<b>Toric joint</b>	Nitrile
16	<b>Screw-on cap</b>	F212

Pressure:

DN20 - DN50: 7 bar  
DN65: 5 bar

Recommended air motor pressure: 4,5kg/cm2

Colour\*

 RAL 5015

For further informations please visit our download section on our website.

\*Other dimensions / materials / colours on request