


Weir type diaphragm valve with threaded ends

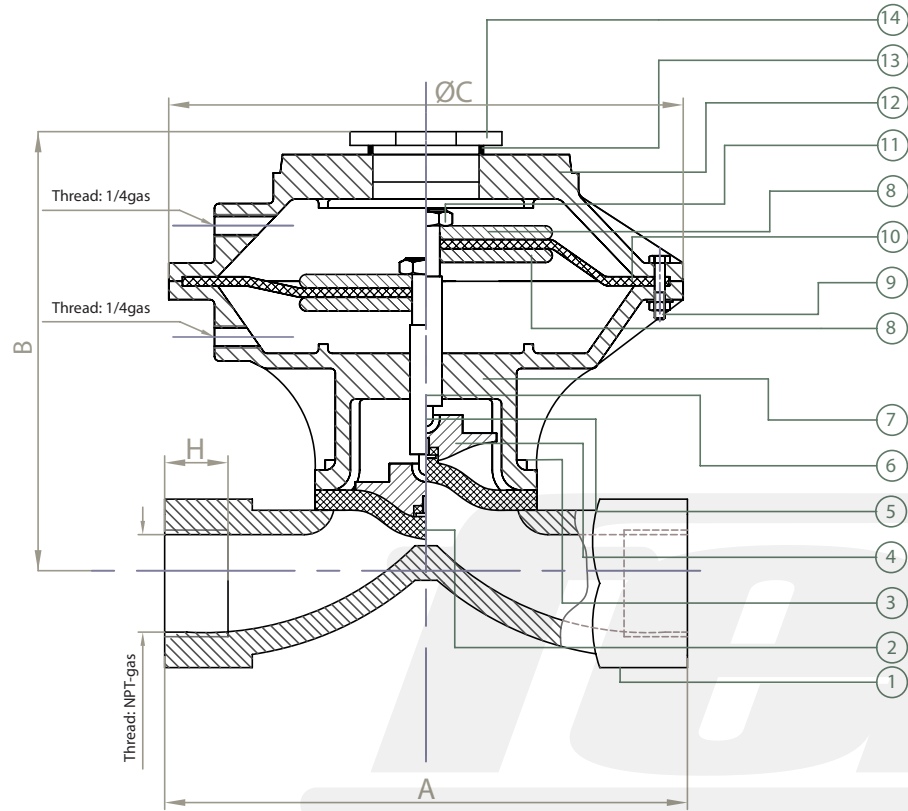

Dimensions*

DN	INCH	Ø C	B	A	H	Weight, [kg]
15	1/2"	145	130	75	10	5
20	3/4"	145	158	83	12	7
25	1"	193	160	103	12	8
32	1 1/4"	250	220	135	15	13,5
40	1 1/2"	250	224	140	15	15,5
50	2"	250	238	165	15	19
65	2 1/2"	390	280	210	15	42
80	3"	390	285	240	15	49

Materials*

1	Body	Ductile iron
2	Diaphragm	Rubber
3	Union studs	8.8
4	Compressor	Cast iron
5	Pin	Stainless steel
6	Spindle	Stainless steel
7	Lower plate	Cast iron
8	Piston Ø32 - Ø80	Cast iron
8	Piston Ø15 - Ø25	F212
9	Union studs	8.8
10	Motor diaphragm	Rubber
11	Spindle nut	Autobloc
12	Upper plate	Cast iron
13	Toric joint	Nitrile
14	Screw-on cap	F212

Pressure:

DN15 - DN80: 10 bar

Recommended air motor pressure: 4,5kg/cm2

Colour*

 RAL 5015

For further informations please visit our download section on our website.

*Other dimensions / materials / colours on request