


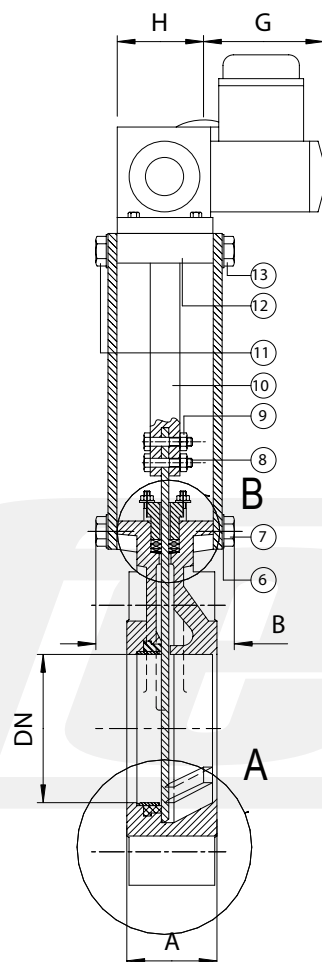
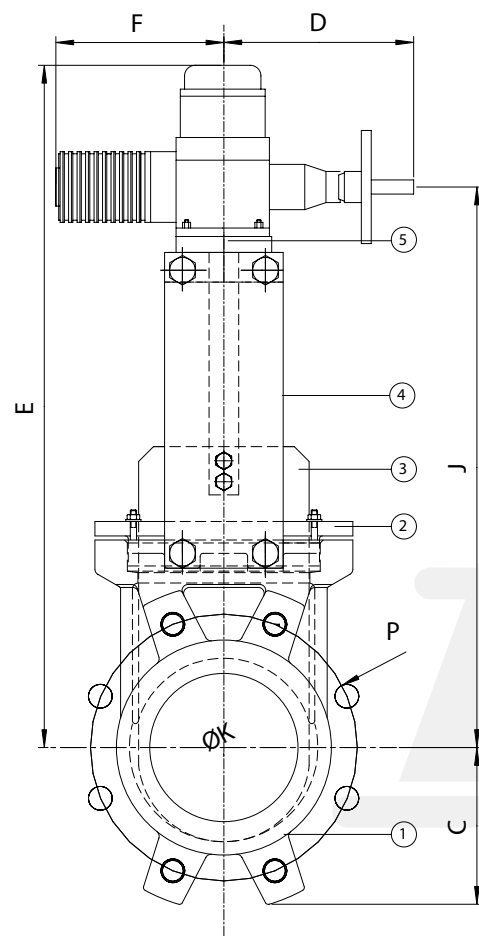








DETAIL A



DETAIL B



Dimensions*

DN	INCH	A	B	C	D	E	F	G	H	J
100	4"	64	92	105	234	699	265	417	62	459
125	5"	70	102	120	250	733	265	417	62	493
150	6"	76	102	130	250	784	265	417	62	544
200	8"	89	119	160	250	880	265	417	62	640
250	10"	114	119	198	250	981	265	417	62	741
300	12"	114	119	234	250	1141	265	417	62	841
350	14"	127	194	256	256	1382	282	427	65	952
400	16"	140	194	292	256	1558	282	427	65	1058
450	18"	152	290	308	325	1886	385	465	90	1186
500	20"	152	290	340	325	1991	385	465	90	1291
600	24"	178	290	400	325	2197	385	465	90	1497

Materials*

Execution in:	Cast iron	Stainless steel
1 Body	GG25	1.4408/CF8M
2 Packing gland	Aluminium	1.4408/SS316
3 Gate	1.4301/SS304	1.4408/SS316
4 Support plates	Steel	Steel
5 Electric motor	-	-
6 Grower washer	Stainless steel	Stainless steel
7 Bolts	Stainless steel	Stainless steel
8 Nut	Stainless steel	Stainless steel
9 Stud	Stainless steel	Stainless steel
10 Spindle	1.4301/SS304	1.4301/SS304
11 Nut	Stainless steel	Stainless steel
12 Manoeuvring	Stainless steel	Stainless steel
13 Bolts	Stainless steel	Stainless steel
14 Seat	EPDM / NBR / Viton / Silicon / Flucast ABP / PTFE	
15 Ring	1.4301/SS304	1.4301/SS304
16 Packing	Synt. + PTFE / PTFE / Graphite / Ceramic fibre	
17 Toric joint	EPDM / NBR / Viton / PTFE	
18 Studs	Stainless steel	Stainless steel
19 Washer	Stainless steel	Stainless steel
20 Nut	Stainless steel	Stainless steel

Pressure

DN100 - DN250:	3 bar
DN300 - DN400:	2 bar
DN450:	1,5 bar
DN500 - DN600:	1 bar

Colour*



Flanges drilled according to
EN 1092-2 and DIN 2501:ISO PN10
(for further informations please visit our download
section on our website)

*Other dimensions / materials / colours on request