
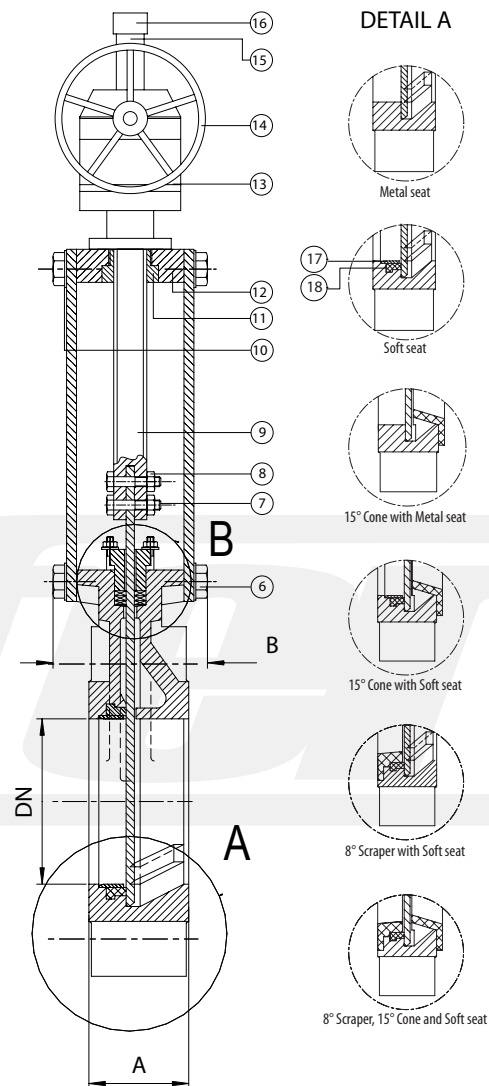


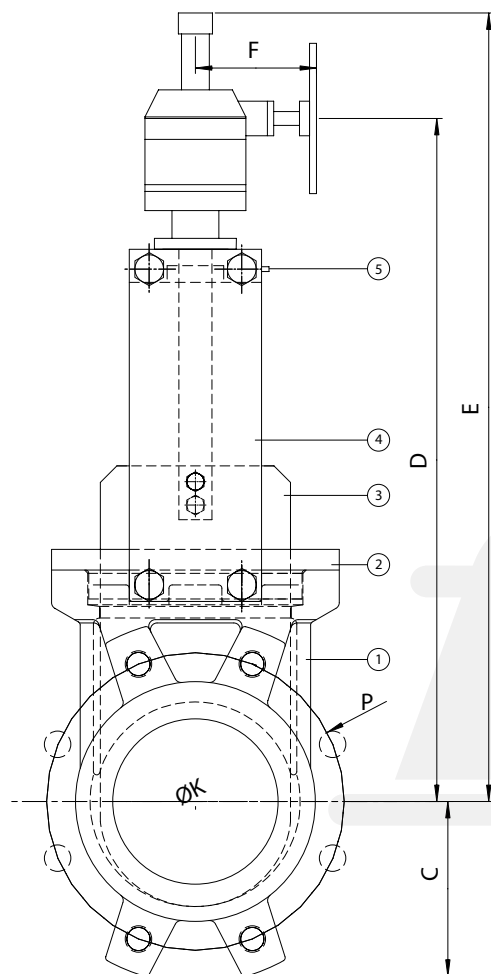

DETAIL A

DETAIL B

Dimensions*

DN	INCH	A	B	C	D	E	F
200	8"	89	119	160	632	947	320
250	10"	114	119	198	733	1048	320
300	12"	114	119	234	833	1148	320
350	14"	127	194	256	974	1390	320
400	16"	140	194	292	1080	1495	320
450	18"	152	290	308	1168	1783	320
500	20"	152	290	340	1273	1890	320
600	24"	178	290	400	1479	2095	320

Materials*

Execution in:	Cast iron	Stainless steel
1 Body	GG25	1.4408/CF8M
2 Packing gland	Aluminium	1.4408/SS316
3 Gate	1.4301/SS304	1.4408/SS316
4 Support plates	Steel	Steel
5 Greaser	Aluminium	Aluminium
6 Nuts	Stainless steel	Stainless steel
7 Bolts	Stainless steel	Stainless steel
8 Nut	Stainless steel	Stainless steel
9 Shaft	1.4301/SS304	1.4301/SS304
10 Washer	Stainless steel	Stainless steel
11 Actuator nut	Bronze	Bronze
12 Bringe	Steel	Steel
13 Reducer		
14 Handwheel	Steel	Stainless steel
15 Tube	1.4301/SS304	1.4301/SS304
16 Cover	Plastic	Plastic
17 Seat	EPDM / NBR / Viton / Silicon / Flucast ABP / PTFE	
18 Ring	1.4301/SS304	1.4301/SS304
19 Packing	Synt. + PTFE / PTFE / Graphite / Ceramic fibre	
20 Toric joint	EPDM / NBR / Viton / PTFE	
21 Studs	Stainless steel	Stainless steel
22 Washer	Stainless steel	Stainless steel
23 Nut	Stainless steel	Stainless steel

Pressure

DN100 - DN250:	3 bar
DN300 - DN400:	2 bar
DN450:	1,5 bar
DN500 - DN600:	1 bar

Colour*

RAL 5015

Flanges drilled according to
EN 1092-2 and DIN 2501:ISO PN10
(for further informations please visit our download
section on our website)

*Other dimensions / materials / colours on request