


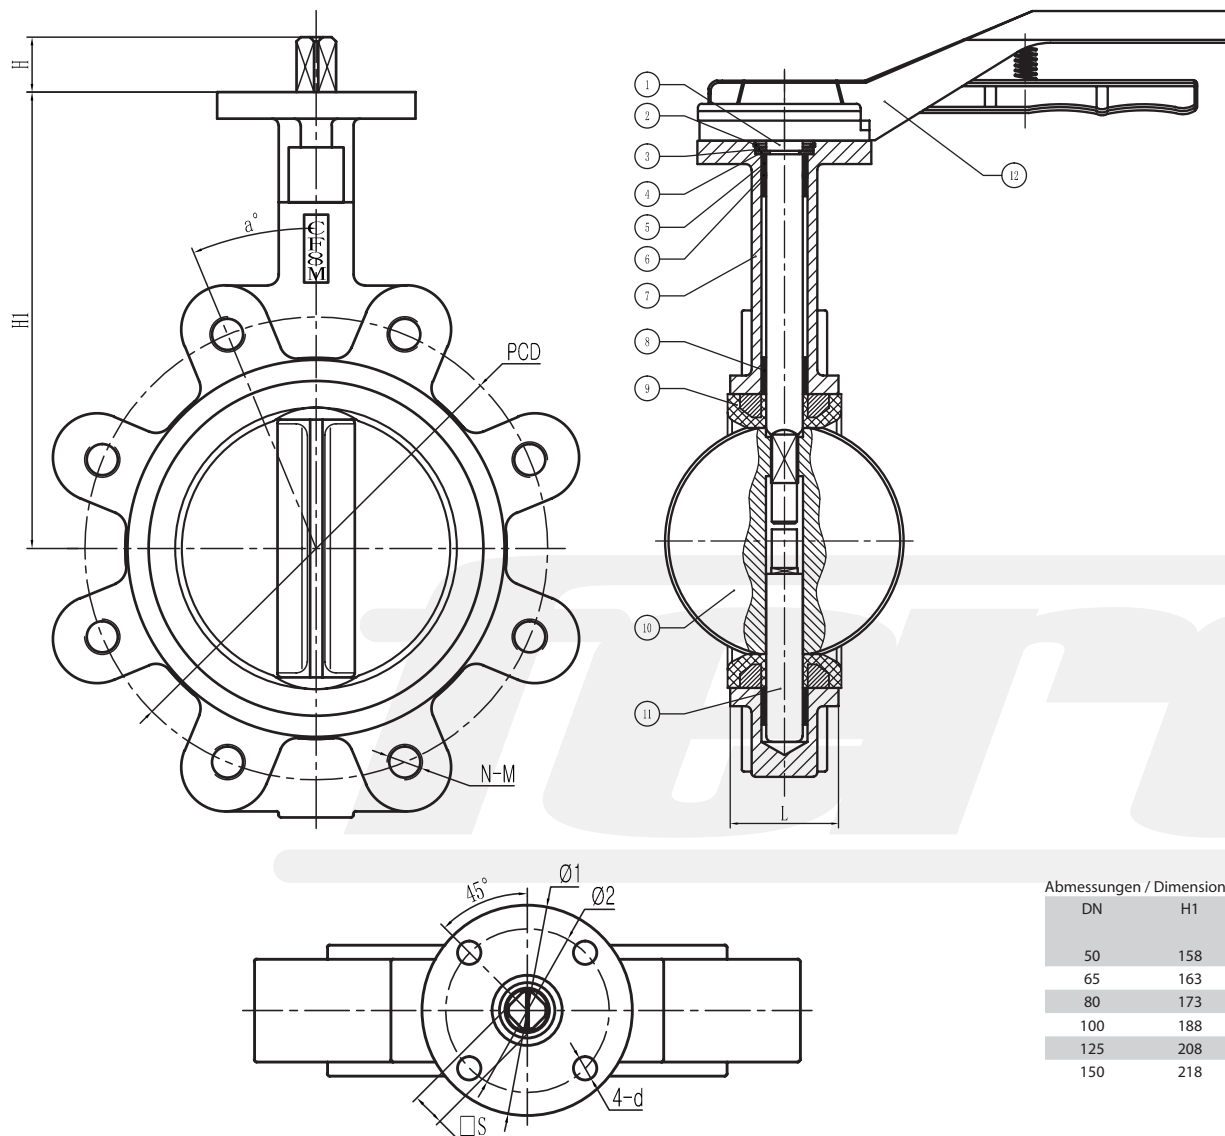

DN50-DN150

Merkmale / Features

- D**
- Absperrklappe
 - Anflanschführung für PN10/PN16
 - Max. Betriebsdruck: 16 bar
 - Temp. (min./max.): -20°C bis +120°C
 - EN1092-2 PN16
 - Baulänge: EN 558 S20, ISO 5752-20
 - Kopfflansch: ISO 5211
 - Leckrate A


- E**
- Butterfly valve
 - Lug Type suitable for flanges PN10/PN16
 - Max. Working pressure: 16 bar
 - Temp. (min./max.): -20°C to +120°C
 - EN1092-2 PN16
 - Face-to-face: EN 558 S20, ISO 5752-20
 - Top flange: ISO 5211
 - Leakage rate A

Werkstoffe / Materials*

Nr.	Bauteil / Part	Material
1	Obere Welle / Upper shaft	SS420
2	Sprengling / Circlip for hole	65Mn
3	Dichtung / Gasket	Q235
4	Klemmfeder / Clamp spring	65Mn
5	Buchse / Bushing	PTFE
6	O-ring / O-ring	NBR
7	Gehäuse / Body	CF8M
8	Buchse / Bushing	PTFE
9	Sitz / Seat	EPDM
10	Scheibe / Disc	CF8M
11	Untere Welle / Lower shaft	SS420
12	Hebel / Lever	Al

Abmessungen / Dimensions*

DN	H1	L	PCD Ø	PN16 N-M	a°	H	S	Ø1	Ø2	d
50	158	43	125	4xM16	45°	25	11	65	50	4x7
65	163	46	145	4xM16	45°	25	11	65	50	4x7
80	173	46	160	8xM16	22,5°	25	11	65	50	4x7
100	188	52	180	8xM16	22,5°	25	11	90	70	4x10
125	208	56	210	8xM16	22,5°	25	14	90	70	4x10
150	218	56	240	8xM20	22,5°	25	14	90	70	4x10

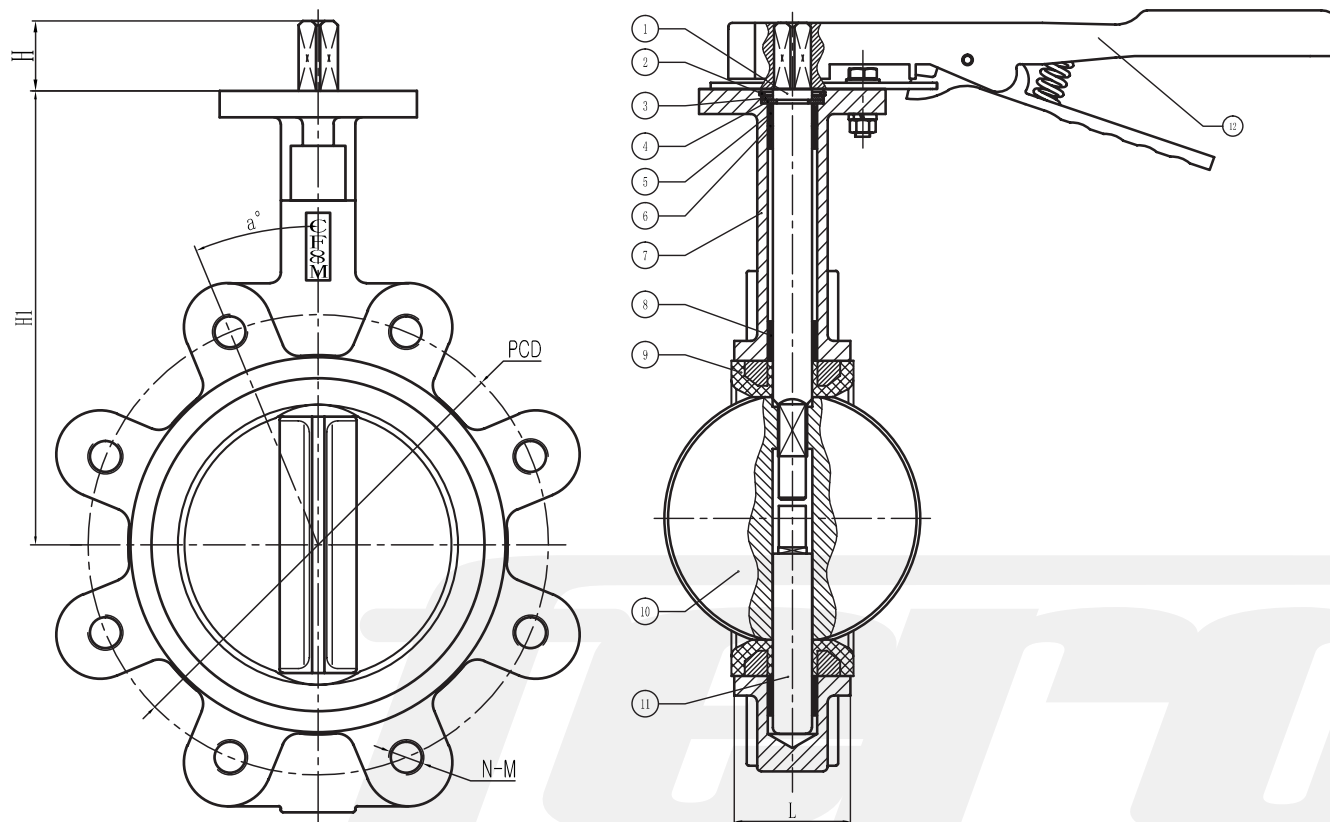

DN200-DN300

Merkmale / Features

- D**
- Absperklappe
 - Anflanschführung für PN10/PN16
 - Max. Betriebsdruck: 16 bar
 - Temp. (min./max.): -20°C bis +120°C
 - EN1092-2 PN16
 - Baulänge: EN 558 S20, ISO 5752-20
 - Kopfflansch: ISO 5211
 - Leckrate A

- E**
- Butterfly valve
 - Lug Type suitable for flanges PN10/PN16
 - Max. Working pressure: 16 bar
 - Temp. (min./max.): -20°C to +120°C
 - EN1092-2 PN16
 - Face-to-face: EN 558 S20, ISO 5752-20
 - Top flange: ISO 5211
 - Leakage rate A

Werkstoffe / Materials*

Nr.	Bauteil / Part	Material
1	Obere Welle / Upper shaft	SS420
2	Sprengring / Circlip for hole	65Mn
3	Dichtung / Gasket	Q235
4	Klemmfeder / Clamp spring	65Mn
5	Buchse / Bushing	PTFE
6	O-ring / O-ring	NBR
7	Gehäuse / Body	CF8M
8	Buchse / Bushing	PTFE
9	Sitz / Seat	EPDM
10	Scheibe / Disc	CF8M
11	Untere Welle / Lower shaft	SS420
12	Hebel / Lever	KTH350-10

Abmessungen / Dimensions*

DN	H1	L	PCD Ø	PN16 N-M	a°	H	S	Ø1	Ø2	d
200	248	60	295	12xM20	15°	45	17	125	102	4x12
250	294	68	355	12xM24	15°	45	22	125	102	4x12
300	333	78	410	12xM24	15°	45	22	125	102	4x12