



**DETAIL A**

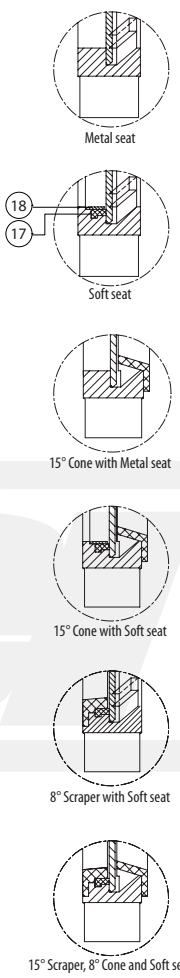

**DETAIL B**



**Dimensions\***

DN	INCH	A	B	C	D	E	F	G
100	4"	64	92	105	330	150	400	590
125	5"	70	102	120	365	150	400	725
150	6"	76	102	130	415	150	400	892
200	8"	89	119	160	520	323	600	1280
250	10"	114	119	198	615	323	600	1430
300	12"	114	119	234	720	323	600	1580

**Materials\***

Execution in:	Cast iron	Stainless steel
1 <b>Body</b>	GG25	1.4408/CF8M
2 <b>Packing gland</b>	Aluminium	1.4408/SS316
3 <b>Gate</b>	1.4301/SS304	1.4408/SS316
4 <b>Support plates</b>	Steel	Steel
5 <b>Greaser</b>	Aluminium	Aluminium
6 <b>Nuts</b>	Stainless steel	Stainless steel
7 <b>Nuts</b>	Stainless steel	Stainless steel
8 <b>Nuts</b>	Stainless steel	Stainless steel
9 <b>Shaft</b>	1.4301/SS304	1.4301/SS304
10 <b>Washer</b>	Stainless steel	Stainless steel
11 <b>Actuator nut</b>	Bronze	Bronze
12 <b>Bridge</b>	Steel	Steel
13 <b>Washer</b>	Brass	Brass
14 <b>Chainwheel</b>	Steel	Steel
15 <b>Screw</b>	Steel	Steel
16 <b>Lever</b>	Plastic	Plastic
17 <b>Seat</b>	EPDM / NBR / Viton / Silicon / Flucast ABP / PTFE	
18 <b>Sealing ring</b>	1.4408/SS316	1.4408/SS316
19 <b>Packing</b>	Synt. + PTFE / PTFE / Graphite / Ceramic fibre	
20 <b>Packing joint</b>	EPDM / NBR / Viton / PTFE	
21 <b>Gland studs</b>	Stainless steel	Stainless steel
22 <b>Washer</b>	Stainless steel	Stainless steel
23 <b>Nut</b>	Stainless steel	Stainless steel

**Pressure**

DN100 - DN250:	3 bar
DN300 - DN400:	2 bar
DN450:	1,5 bar
DN500 - DN600:	1 bar

**Colour\***



Flanges drilled according to EN 1092-2 and DIN 2501: ISO PN10  
(for further informations please visit our download section on our website)

\*Other dimensions / materials / colours on request